



FIRE DEPARTMENT

9 METROTECH CENTER

BROOKLYN, N.Y. 11201-3857

CERTIFICATE OF APPROVAL # 6174 **THIS CERTIFICATE IS REVOCABLE, NOT TRANSFERABLE** **and EXPIRES on JUNE 10, 2017**

By order of Fire Commissioner Salvatore Cassano, and pursuant to Section FC 112 of the New York City New Fire Code, the following equipment or system is accepted for use provided the conditions as outlined below are in full compliance.

Manufacturer:	Bosch Security Systems, Inc.
Trade Name:	Bosch
Product:	Fire Alarm Control Panel
Basic Model Number(s):	D7412GV4, D9412GV4
Pertinent Code Section(s):	Section FC 901 of the New York City Fire Code
Test(s) Standards(s):	UL 864 9 th Edition
Laboratory:	Underwriters Laboratories, Inc.
Test Report(s):	UL S1871, issued 2011-08-01, revised 2013-09-14
Description:	<p>The D7412GV4, D9412GV4 control panels provide up to 256 individually identified programmable points. The control panel includes communication modules that send events through public switched telephone network (PSTN), IP network, or cellular network.</p> <p>Internet and Cellular communication modules designed to transmit status of FACP directly to Central Station via Internet or Cellular network.</p> <p>UL lists the D7412GV4 and D9412GV4 as signal systems control panel for central station, local, auxiliary, remote station, and proprietary.</p> <p>Model B450 Communicator Interface Module – The communication interface module employed a listed Cellular Modules, Model B440 or B441 to provide cellular communication for Bosch's listed panels, Model FPD-7024, GV3 Series, GV4 Series, B3512, B4512, and B5512.</p> <p>D7412GV4, D9412GV4 Control Panels along with associated modules itemized in Table 1.</p>

Table 1.

	Bosch No.	Product Description	Prior Approval	UL File
1	D125B	Powered Loop Interface	582-85-SA (4-22-86)	S1871, Vol. 14, S1
2	D928	Phone Line Switcher	12-92-E Vol. V	S1871, Vol. 14, S1
3	D129	Dual Class A Initiating Circuit Module	582-85-SA (4-22-86)	S1871, Vol. 14, S1
4	D130	Relay Module	12-92-E Vol. II	S1871, Vol. 14, S1
5	D192G	Notification Appliance Circuit Module	582-85-SA (4-22-86)	S1871, Vol. 14, S1
6	D8004	Transformer Enclosure	582-85-SA (4-22-86)	S5579, Vol. 1, Sec. 1
7	D8129	OctoRelay Module	582-85-SA (3-7-89)	S1871, Vol. 14, S1
8	D8130	Door Release Module	582-85-SA (3-7-89)	S1871, Vol. 14, S1
9	D185	Reversing Polarity Module	12-92-E Vol. VII	S1871, Vol. 14, S1
10	DX4020	Network Interface Module	12-92-E Vol. XIII	S5579, Vol. 1 Sec. 19
11	ITS-DX4020-G	GPRS/GSM IP Communicator	COA # 6059	S1871, Vol. 21, Sec. 2
12	D9127T, D9127U	POPIT Module	582-85-SA (3-7-89)	S1871, Vol. 14, S1
13	D8128D	OctoPopit Module	582-85-SA (4-22-86)	S1871, Vol. 14, S1
14	D1255RB, D1256RB, D1257RB	Keypads, Annunciators	12-92-E Vol. IV	S5579, Vol. 1, Sec 91-10
15	D8125	Zone Expander Module	582-85-SA (4-22-86)	S1871, Vol. 14, S1
16	B426	Network Interface Module	COA # 6147	S5579, Vol. 1 Sec. 19
17	C900V2	Dialer Capture Module	12-92-E Vol. XIII	S5579, Vol. 1 Sec. 19

Expires on June 10, 2017
 COA #6174 for Bosch
 F.P. Index#: 1405054A
 FPIMS#: 34111906
 June 11, 2014
 Page 3 of 6

	Bosch No.	Product Description	Prior Approval	UL File
18	D8103, D8109, D8108A	Enclosure	582-85-SA(4-22-86)	S1871, Vol. 5, Sec. 1
19	ICP-SDI-9114	SDI Splitter	COA # 6059	S5579, Vol. 1, Sec. 9
20	B208	Input Module	COA # 6102	S5579, Vol. 9, Sec. 1
21	B308	Output Module	COA # 6102	S5579, Vol. 9, Sec. 1
22	B420	Ethernet Module	COA # 6102	S5579, Vol. 1, Sec. 19
23	B450	Cellular Interface Module	New	S1871, Vol. 23 Sec. 1
24	B440	Cellular Module	New	S1871, Vol. 23 Sec. 1
25	B441	Cellular Module	New	S1871, Vol. 23 Sec. 1
26	B443	Cellular Module	New	S1871, Vol. 23 Sec. 1

Conditions of Approval:

1. All uses, configurations, arrangements and functions, application and installations shall comply with the provisions of New York City Construction Codes, specifically Building Code Chapter 9 & Appendix Q Section BC Q106, and New York City Electrical Code. Further, the installation shall be in accordance applicable provisions of New York City Fire Code, manufacturer's recommendations and UL Standard 864.
2. The installation and operation of the above referenced control units for central station monitoring of fire alarm system shall comply with 3RCNY R901-01. It shall have the capability of transmitting separate and distinct signals to indicate manual pull station alarm, automatic detection alarm, sprinkler waterflow alarm, supervisory signal indications, and trouble indications.
3. When installed as a Central Station Internet/Cellular communicator or transmitter **both primary and secondary channels of communication** shall be required and shall meet the conditions of 3.1 – 3.7. **Network communication shall be used as primary channel** of communication with Central Station and **Cellular Communicator shall be used as the secondary channel** of communication **or in reverse order**: Cellular Communicator as primary and Internet connection as the secondary channel.

- 3.1. Each communication channel shall be monitoring for integrity at intervals not exceeding 24 hours
- 3.2. Failure any channel of communication shall be annunciated at the protected premises within 5 minutes of failure
- 3.3. The failure of either channel shall be annunciated at Central Station within 5 minutes of failure by the remaining active channel.
- 3.4. Reliability of the signal shall be achieved by any of the following:
 - 3.4.1. Signal repetition — multiple transmissions repeating the same signal
 - 3.4.2. Parity check — a mathematically check sum algorithm of a digital message that verifies correlation between transmitted and received message
 - 3.4.3. An equivalent means that provides a certainty of 99.99 percent that the received message is identical to the transmitted message
- 3.5. The maximum duration between the initiation of an alarm signals at the protected premises, transmission of the signal, and subsequent display and recording of the alarm signal at the Central Station shall not exceed 90 seconds
- 3.6. A spare Central Station Receiver shall be provided at the Central Station and shall be able to be switched into the place of a failed unit within 30 seconds after detection of failure
- 3.7. All applicable requirements of Federal Communications Commission (FCC) shall be complied with.
4. When installed as a standalone communicator or transmitter, all conditions outlined in items #2 and #3 shall be fully complied with. The primary and secondary power supply shall be in accordance with the requirements of the fire alarm system installed.
5. The D7412GV4, D9412GV4 FACP shall not be installed as a part of Fire Command Center, but as a standalone communicator can be used in high-rise installations to communicate with Central Station
6. All communication devices such as the wireless receiver, repeaters, antennas, control panel wiring, shall be installed and dedicated for communication and transmission of fire alarm system signals and shall be properly secured at all times from unauthorized use. All wiring used for network communications shall be plenum rated cable with a minimum temperature rating of 150°C.
7. The above referenced Control Units shall be used only with listed fire alarm equipment and devices with which the compatibility has been determined by Underwriters Laboratories test reports.

Expires on June 10, 2017

COA #6174 for Bosch

F.P. Index#: 1405054A

FPIMS#: 34111906

June 11, 2014

Page 5 of 6


8. The connection of security/burglar devices and equipment to the fire alarm control unit is prohibited. A sign must be provided to indicate the same.
9. Annunciator is acceptable under the condition that this unit shall be used to acknowledge the alarm and all its control functions, including alarm silence and panel reset shall be disabled.
10. Only enclosures painted red in color shall be used.
11. Underwriters Laboratories Inc.'s Listing requirements and limitations shall be complied with.
12. All installations are subject to inspection, test, and approval from Fire Alarm Inspection Unit (FAIU).
13. Any change in Central Station communication service provider shall be reported to FAIU and is subject to re-inspection, test, and approval.
14. Certificate of Approval number shall be plainly and permanently stamped or otherwise fixed upon each product by the applicant.
15. The Fire Department's conditions of approval shall be enumerated in the installation manuals and brochures that will be provided to all New York City buyers and users.
16. Fire Department Certificate of Approval does not constitute an endorsement or recommendation of your product by the Fire Department, but is a certification that your product is acceptable as of the date of issuance.
17. The Fire Department reserves the right to withdraw this approval at any time in the event there is a reasonable doubt that the product does not operate or perform as required by code, the conditions of this resolution or as represented in your application.
18. As the manufacturer of this product, you should be aware that any end user who fails to comply with the condition as outlined in the approval would be subject to enforcement action, which may include fines and imprisonment.
19. This Certificate of Approval does not grant the right to use any trademark associated with the New York City Fire Department (the letters FDNY, the FDNY Shield design, the FDNY Maltese Cross design, and the seal of the City of New York). The unauthorized use of trademarks in connection with the sale of commercial goods or services violates federal and state laws.
20. Products marked to indicate the Certificate of Approval number might refer to the "NYC Fire Department" or "NYC Fire Dept" (e.g., "NYC Fire Dept Certificate of Approval #XXXX).

Any change in company name or ownership, product name, design or model number of any product included on this certificate must be immediately reported to this Department in writing.

Expires on June 10, 2017
COA #6174 for Bosch
F.P. Index#: 1405054A
FPIMS#: 34111906
June 11, 2014
Page 6 of 6

When responding to this Department regarding this subject matter, kindly refer to F.P. Index # 1405054A and to Igor Chouchereba attention, 9 MetroTech Center #1S-43-K, phone (718) 999-1997.

Very truly yours,

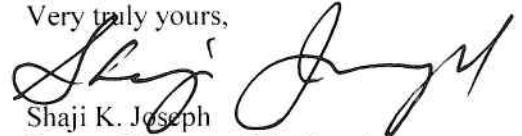

Shaji K. Joseph
Deputy Director of Engineering
Technology Management

c: Tamara Saakian, Director of Technology Management