


# FLM-420-NAC Signaling Device Interface Modules

www.boschsecurity.com



**BOSCH**  
Invented for life

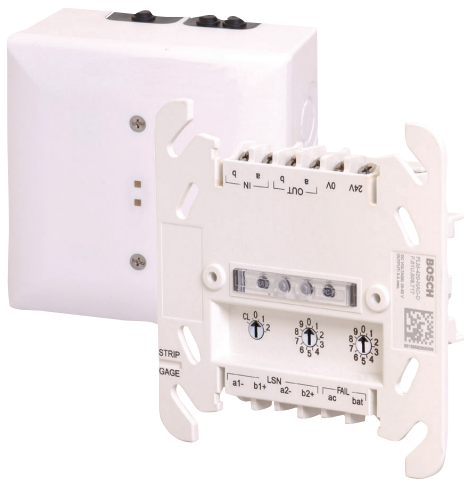


- ▶ Rotary switches for automatic or manual address setting
- ▶ Control of signaling device line by pole reversal
- ▶ Synchronized activation of all signaling devices connected to a LSN module via FLM-420-NAC Signaling Device Interface Module
- ▶ Ten different output signals via LSN selectable
- ▶ Maintains LSN loop functions in the event of wire interruption or short-circuit thanks to two integrated isolators

FLM-420-NAC Signaling Device Interface Modules make it possible to monitor and activate a group of signaling devices (NAC = Notification Appliance Circuit) in the Local SecurityNetwork LSN. Each interface module offers one monitored primary line. This means one signaling device line can be connected to LSN fire panels.

The following can be connected:

- Sounders
- Strobes
- Horns.

## System Overview



Description	Connector
b IN / a IN	NAC zone input
b OUT / a OUT	NAC zone output
0 V / 24 V	Ext. power supply
a1- / b1+	LSN in
a2- / b2+	LSN out

FAIL ac	Trouble ext. voltage
FAIL bat	Trouble ext. battery

### Functions

#### Interface module variants

Two different versions of the interface module are available:

- FLM-420-NAC-S for surface-mounting with housing
- FLM-420-NAC-D for installation on a DIN rail with adapter.

#### Functions

The functions of the signaling device interface module are:

1. Activation of signaling devices in the event of an alarm
2. Monitoring the signaling device line
3. Monitoring the ext. power supply
4. Status display via LEDs

When activated signaling devices connected to FLM-420-NAC zones are synchronized through the LSN module they are connected to.

The control of the signaling device line is performed through polarity reversal.

The status of the NAC zone is shown by a red and a green LED.

#### Rotary switches

The rotary switch integrated in the interface module can be used to select between automatic or manual addressing with or without auto detection.

The following settings are possible:

0 0 0	Loop/stub in LSN mode improved version with automatic addressing (T-tap system not possible)
0 0 1 - 254	Loop/stub/T-tap system in LSN mode improved version with manual addressing
CL 0 0	Loop/stub in classic LSN mode

#### LSN features

Integrated isolators ensure that function is maintained in the event of a short circuit or line interruption in the LSN loop. A fault indication is sent to the fire panel.

#### Features of LSN improved version

The interface modules in the 420 series offer all the features of improved LSN technology:

- Flexible network structures including T-tapping without additional elements
- Up to 254 LSN improved elements per loop or stub line
- Unshielded cable can be used
- Downwards compatible with existing LSN systems and control panels.

### Certifications and Approvals

Complies with

- EN54-17:2005
- EN54-18:2005

Region	Certification	
Europe	CE	FLM-420-NAC/-S/-D
Hungary	TMT	TMT-24/2006 FLM-420-NAC, FLM-I 420-S
Germany	VdS	G 207052 FLM-420-NAC-S; FLM-420-NAC-D
Europe	CPD	0786-CPD-20375 FLM-420-NAC
	MOE	UA1.016-0070266-11 FLM-420-NAC-S_FLM-420-NAC-D

### Installation/Configuration Notes

- Can be connected to the fire panels FPA-5000 and FPA-1200 and the classic LSN fire panels BZ 500 LSN, UEZ 2000 LSN and UGM 2020.
- National standards and guidelines must be taken into account during the planning stage.
- An external power supply is required for the FLM-420-NAC interface module.
- The surface-mounted housing has two cable ducts on opposite sides:
  - 2 x 2 pre-punched cable ducts for diameter up to 21 mm/to 34 mm (for conduits)
  - 2 x 4 rubber bushes for inserting cables with diameters of up to 8 mm.
- In addition, there are cable ducts on the base of the surface-mounted housing:
  - 1 x pre-punched cable duct for diameter up to 21 mm (for conduits)
  - 2 x 4 rubber bushes for inserting cables with diameters of up to 8 mm.
- For operating the fire alarm system according to EN 54-13 the signaling device line must be designed in loop topology.

### Parts Included

Type	Qty	Components
FLM-420-NAC-S	1	Signaling Device Interface Module with surface-mounted housing
FLM-420-NAC-D	1	Signaling Device Interface Module for installation on a DIN rail with adapter
	1	3.9 kOhm resistor

### Technical Specifications

#### Electrical

Input voltage	15 V DC to 33 V DC
Max. current consumption	
<ul style="list-style-type: none"> <li>• from LSN</li> </ul>	6,06 mA (normal operation and alarm)
<ul style="list-style-type: none"> <li>• from external power supply</li> </ul>	15 mA (normal operation) + output current
External power supply	20,4 V DC to 29 V DC

Max. output current	3 A (during an alarm, from ext. power supply)
EOL resistance	3.9 kΩ
<b>Mechanics</b>	
Display elements	
• Red LED	Alarm
• Green LED	Normal operation
LSN/Address setting	3 rotary switches for
	<ul style="list-style-type: none"> <li>• Mode LSN "classic" or LSN improved version</li> <li>• Automatic or manual addressing</li> </ul>
Connections	12 threaded clamps
Max. wire diameter for terminals	3.3 mm <sup>2</sup> (12 AWG)
Housing material	
• Interface module	PPO (Noryl)
• Surface-mount housing	ABS/PC-Blend
Housing color	
• Interface module	Off-white, similar to RAL 9002
• Surface-mount housing	Signal white, RAL 9003
Dimensions	
• FLM-420-NAC-S	Approx. 126 x 126 x 71 mm (4.96 x 4.96 x 2.8 in.)
• FLM-420-NAC-D (with DIN rail adapter)	Approx. 110 x 110 x 48 mm (4.33 x 4.33 x 1.89 in.)
Weight	
FLM-420-NAC-S	Approx. 390 g (13.8 ounces)
FLM-420-NAC-D (with DIN rail adapter)	Approx. 150 g (5.3 ounces)

**System limits**

Number of zones per signaling device interface module	1
---	---

**Further characteristics**

Output signals	Steady BS 5839 March Time March Time 120 California Coded Synchronization protocol (Wheelock, Gentex)
----------------	--

**Environmental conditions**

Permitted operating temperature	-20 °C to 50 °C (-4 °F to 122 °F)
Permitted storage temperature	-25 °C to 80 °C (-13 °F to 176 °F)
Permitted relative humidity	< 96%
Classes of equipment as per IEC 60950	Class III equipment
Protection class as per IEC 60529	
• FLM-420-NAC-S	IP 54
• FLM-420-NAC-D	IP 30

**Ordering Information**

**FLM-420-NAC-S Signaling Device Interface Module** with 1 supervised output line for conventional signaling devices, with surface-mounted housing  
Order number **FLM-420-NAC-S**

**FLM-420-NAC-D Signaling Device Interface Module** with 1 supervised output line for conventional signaling devices, for installation on a DIN rail with adapter  
Order number **FLM-420-NAC-D**

**Represented by:**

**Americas:**

Bosch Security Systems, Inc.  
130 Perinton Parkway  
Fairport, New York, 14450, USA  
Phone: +1 800 289 0096  
Fax: +1 585 223 9180  
security.sales@us.bosch.com  
www.boschsecurity.us

**Europe, Middle East, Africa:**

Bosch Security Systems B.V.  
P.O. Box 80002  
5617 BA Eindhoven, The Netherlands  
Phone: + 31 40 2577 284  
Fax: +31 40 2577 330  
emea.securitysystems@bosch.com  
www.boschsecurity.com

**Asia-Pacific:**

Robert Bosch (SEA) Pte Ltd, Security  
Systems  
11 Bishan Street 21  
Singapore 573943  
Phone: +65 6571 2808  
Fax: +65 6571 2699  
apr.securitysystems@bosch.com  
www.boschsecurity.asia

**China:**

Bosch (Shanghai) Security Systems Ltd.  
201 Building, No. 333 Fuquan Road  
North IBP  
Changning District, Shanghai  
200335 China  
Phone +86 21 22181111  
Fax: +86 21 22182398  
www.boschsecurity.com.cn

**America Latina:**

Robert Bosch Ltda Security Systems Division  
Via Anhanguera, Km 98  
CEP 13065-900  
Campinas, Sao Paulo, Brazil  
Phone: +55 19 2103 2860  
Fax: +55 19 2103 2862  
al.securitysystems@bosch.com  
www.boschsecurity.com