


# RF3222E RF Receiver (433.42 MHz)

www.boschsecurity.com



**BOSCH**  
Invented for life

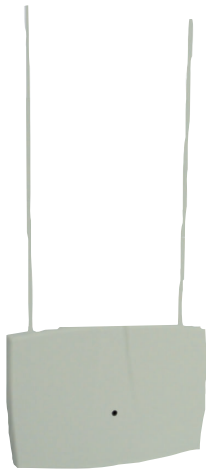

- ▶ Compatible with the DS7400XiV4 panels
- ▶ Receives low battery, tamper, and sensor status reports
- ▶ LED indicates receiver status
- ▶ Cover and wall tamper
- ▶ System allows two receivers for larger area coverage

The RF3222E RF Receiver allows the multiplex bus of the DS7400XiV4 Control Panels to receive RF signals from up to 112 wireless devices. The RF3222E supports up to eight keypads and 112 keyfobs or input sensors.

Tamper, jam detection, and sensor missing status reports provide reassurance that the system works correctly.

The RF3222E receives at 433.42 MHz.

## Certifications and approvals

Region	Certification
Europe	CE 1999/5/EC, EN60950: 1993 +A1 +A2 +A3 +A4, EN300220-1: 1997, EN300683: 1997
	CE 2014/30/EU EMC Directive (EMC); 2014/35/EU Low-Voltage Directive (LVD); 1999/5/EC Radio equipment and Telecommunications Terminal Equipment (R&TTE); 2011/65/EU Restriction of the use of certain hazardous substances in electrical and electronic equipment (RoHS)

## Installation/configuration notes

### Compatible Products

The following products are compatible with the RF3222E Receiver:

Category	Product ID	Product Description
Detectors	RF280ETHS	Wireless smoke detector
	RF835E	Wireless TriTech® detector
	RF940E	Wireless PIR detector
	RF1100E	Wireless glass-break detector
	RF3401E	Wireless point transmitter
Keypads and fobs	RF3332E	Two-button key fob
	RF3334E	Four-button key fob

### Wiring Considerations



#### Notice

A DS7430 or DS7436 Multiplex Module is needed to connect the RF3222E Receiver to a DS7400XiV4 Control Panel.

The wire length between the receiver and the control panel should not exceed 300 m. Use solid wire with a minimum diameter of 0.8 mm or stranded wire with a minimum diameter of 1.0 mm. Shielded cable is not recommended.



#### Notice

Do not use twisted pair wire.

### Parts included

Quant.	Component
1	RF3222E Receiver
2	433.42 MHz antennas
1	Hardware pack
1	Literature pack

### Technical specifications

#### Environmental Considerations

Temperature (operating):	0°C to +66°C
--------------------------	--------------

#### Mechanical Properties

Dimensions including antennas:	25.6 cm x 15.2 cm x 3 cm
--------------------------------	--------------------------

#### Power Requirements

Current:	30 mA, nominal
Voltage:	12 V, nominal

#### Trademarks

TriTech® is a registered trademark of Bosch Security Systems in the United States.

### Ordering information

#### RF3222E RF Receiver (433.42 MHz)

Receives RF signals from up to 112 wireless devices; operates at 433.42 MHz

Order number **RF3222E**

#### Represented by:

##### Americas:

Bosch Security Systems, Inc.  
130 Perinton Parkway  
Fairport, New York, 14450, USA  
Phone: +1 800 289 0096  
Fax: +1 585 223 9180  
security.sales@us.bosch.com  
www.boschsecurity.us

##### Europe, Middle East, Africa:

Bosch Security Systems B.V.  
P.O. Box 80002  
5617 BA Eindhoven, The Netherlands  
Phone: + 31 40 2577 284  
Fax: +31 40 2577 330  
emea.securitysystems@bosch.com  
www.boschsecurity.com

##### Asia-Pacific:

Robert Bosch (SEA) Pte Ltd, Security Systems  
11 Bishan Street 21  
Singapore 573943  
Phone: +65 6571 2808  
Fax: +65 6571 2699  
apr.securitysystems@bosch.com  
www.boschsecurity.asia

##### China:

Bosch (Shanghai) Security Systems Ltd.  
201 Building, No. 333 Fuquan Road  
North IBP  
Changning District, Shanghai  
200335 China  
Phone +86 21 22181111  
Fax: +86 21 22182398  
www.boschsecurity.com.cn

##### America Latina:

Robert Bosch Ltda Security Systems Division  
Via Anhanguera, Km 98  
CEP 13065-900  
Campinas, Sao Paulo, Brazil  
Phone: +55 19 2103 2860  
Fax: +55 19 2103 2862  
latam.boschsecurity@bosch.com  
www.boschsecurity.com