

G3B Series BasicDome Economical Systems

www.boschsecurity.com



BOSCH

Invented for life



- ▶ 16x optical zoom
- ▶ Integrated high performance color camera system
- ▶ High speed
- ▶ Affordable, yet feature-rich
- ▶ Easy to install

The BasicDome camera is the economical high speed camera solution for indoor security applications. It offers a faster, a quieter and a smoother operation than ever before in a dome in this price range. The BasicDome is the perfect choice for those who want the assurance of the Bosch name, at an affordable price.

Functions

The BasicDome is designed to save you time as well as money. The same camera assembly easily locks into either the pendant mount or the in-ceiling box.

It includes an on-screen display for remote programming, so you can set it up correctly the first time, and easily optimize the camera under changing conditions. Even the BasicDome address is set remotely using Bosch FastAddress.


A rugged motor with fewer moving parts allows the BasicDome to use less power and to be extremely reliable, making it ideal for high-usage applications. As with all AutoDome systems, the BasicDome includes our patented AutoPivot feature that automatically rotates and flips the camera, so tracking a subject under the dome is effortless. The

BasicDome's design, flexibility, and versatility make this feature-rich camera an affordable and valuable addition to any security system.

Remote control, configuration, and updates can be performed over the video cable (coax or passive UTP) when using Bilinx-compatible control and configuration devices (such as the VP-CFGSFT configuration tool or LTC 8016 Allegiant Bilinx Interface).

The menu for these devices can display multiple languages, including: English, French, German, Spanish, Portuguese and Polish.

Installation/configuration notes

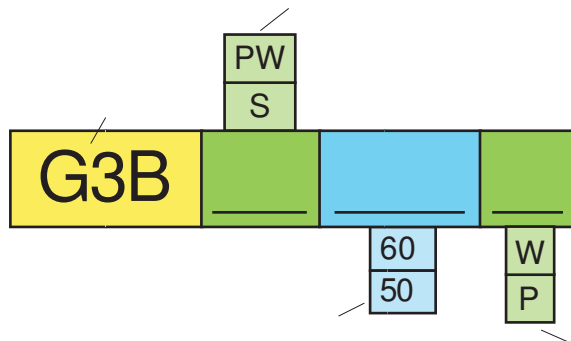

- 1 AutoDome
- 2 PW-Pendant White
S-Suspended Ceiling
- 3 W-Wall¹
P-Pipe¹
- 4 60-24 VAC, 60 Hz NTSC
50-24 VAC, 50 Hz PAL

1. Wall and pipe mount kits apply only to pendant models.

Technical specifications

Electrical

Color Camera

Imager	Interline transfer CCD 1/4 in. image format
Active Pixels	
PAL Model (H x V)	752 x 582
NTSC Model (H x V)	768 x 494
Lens	16x zoom (4.1-65.6 mm)
	F1:1.4 to F1:3.0
Focus	Automatic with manual override
Iris	Automatic with manual override
Field of View	2.7° to 48°
Video Output	1.0 Vp-p, 75 Ohm
Gain	Off / auto
Synchronization	Line-Lock (-120° to 120° vertical phase adjust) or internal crystal
Aperture Correction	Horizontal and vertical
Digital Zoom	Not applicable
Horizontal Resolution	
NTSC Model	470 TVL
PAL Model	460 TVL

Sensitivity	
Sensitivity (Minimum Usable Video: 20 IRE)	0.5 lux (0.05 fc)
Sensitivity (Usable Video: 50 IRE)	0.8 lux (0.08 fc)
Signal-To-Noise Ratio	>50 dB
White Balance	2000 K to 10,000 K

Environmental

Design Rating	IP 31 (NEMA 2)
Operating Humidity	0%-90% non-condensing
Operating Temperature	-10°C to 50°C (14°F to 122°F)
Storage Temperature	-40°C to 60°C (-40°F to 140°F)

Incompatibility Statement

Bosch BasicDomes use the remote addressing feature, FastAddress, exclusively. There is no manual way to set the address using switches. Because of this, these domes are not compatible with Bosch systems that meet the following criteria:

Fixed Speed Keyboards	<ul style="list-style-type: none"> • LTC 8500/LTC 8600/LTC 8800 CPUs version 5.2 or older. • Any LTC 8500/LTC 8600/LTC 8800 CPUs without two (2) 8-position dip switches. • Any LTC 8600/LTC 8800 sold before 6/94 and LTC 8500 sold before 5/95.
-----------------------	--

Older LTC 8500/LTC 8600/LTC 8800 systems can be upgraded by replacement of CPU with current version. Changes to other system accessories may also be necessary when upgrading to variable speed (for example, keyboards, receiver/drivers, port expanders, etc.).

Mechanical

Weight	1.7 kg (3.7 lb)
Pan/Tilt	360° continuous, 0° to 90° tilt
Pre-position Speed	360°/sec., ±0.5° accuracy
Variable Speed	120°/sec.
Power Consumption	15 W

Miscellaneous

Camera Setup Control	Bi-phase or RS-232
Pre-Positions	99, each with 16-character titles
Guard Tour	<ul style="list-style-type: none"> • Recorded tours - two (2), with a total duration of 15 minutes. • All camera functions stored in memory.
Addressing	FastAddress remote addressing
Sectors/Titling	16 independent sectors with 16-character titles/sector.

Ordering information**G3B51C BasicDome Color Camera Module**

16x color, PAL, indoor drop ceiling, tinted dome, 24 VAC, 50 Hz

Order number **G3B51C**

G3B61 BasicDome Color Camera Module

16x color, NTSC, indoor drop ceiling, color, tinted dome, 24 VAC, 60 Hz

Order number **G3B61**

G3BS50 BasicDome Color Kit

16x color, PAL, indoor drop ceiling, tinted dome, 24 VAC, 50 Hz

Order number **G3BS50**

G3BS60 BasicDome Color Kit

16x color, indoor drop ceiling, tinted dome, 24 VAC, 60 Hz

Order number **G3BS60**

G3BS50 BasicDome Color Kit

16x color, indoor suspended ceiling, wall mount, tinted dome, 24 VAC, 50 Hz

Order number **G3BS50W**

G3BS60W BasicDome Color Kit

16x color, indoor suspended ceiling, wall mount, tinted dome, 24 VAC, 60 Hz

Order number **G3BS60W**

G3BS60P BasicDome Color Kit

16x color, indoor suspended ceiling, pipe mount, tinted dome, 24 VAC, 60 Hz

Order number **G3BS60P**

G3BPW50W BasicDome Color Kit

16x color, PAL, indoor pendant, wall mount, tinted dome, white, 24 VAC, 50 Hz

Order number **G3BPW50W**

G3BPW50P BasicDome Color Kit

16x color, PAL, indoor pendant, pipe mount, tinted dome, white, 24 VAC, 50 Hz

Order number **G3BPW50P**

G3BPW60W BasicDome Color Kit

16x color, NTSC, indoor pendant, wall mount, tinted dome, white, 24 VAC, 60 Hz

Order number **G3BPW60W**

G3BPW60P BasicDome Color Kit

16x color, NTSC, indoor pendant, pipe mount, tinted dome, white, 24 VAC, 60 Hz

Order number **G3BPW60P**

G3BPC60P BasicDome Color Kit

16x color, indoor pendant, pipe mount, tinted dome, charcoal, 24 VAC, 60 Hz

Order number **G3BPC60P**

G3BPC60W BasicDome Color Kit

16x color, indoor pendant, wall mount, color (NTSC), tinted dome, charcoal, 24 VAC, 60 Hz

Order number **G3BPC60W**

G3B BasicDome Dummy Kit

dome and trim ring only

Order number **G3B**

G3BS BasicDome Backbox

indoor drop ceiling kit

Order number **G3BS**

G3BPW BasicDome Backbox

pendant, white

Order number **G3BPW**

G3BPC BasicDome Pendant Backbox

Charcoal

Order number **G3BPC**

Represented by:

Americas:

Bosch Security Systems, Inc.
130 Perinton Parkway
Fairport, New York, 14450, USA
Phone: +1 800 289 0096
Fax: +1 585 223 9180
security.sales@us.bosch.com
www.boschsecurity.us

Europe, Middle East, Africa:

Bosch Security Systems B.V.
P.O. Box 80002
5617 BA Eindhoven, The Netherlands
Phone: + 31 40 2577 284
Fax: +31 40 2577 330
emea.securitysystems@bosch.com
www.boschsecurity.com

Asia-Pacific:

Robert Bosch (SEA) Pte Ltd, Security
Systems
11 Bishan Street 21
Singapore 573943
Phone: +65 6571 2808
Fax: +65 6571 2699
apr.securitysystems@bosch.com
www.boschsecurity.asia

China:

Bosch (Shanghai) Security Systems Ltd.
201 Building, No. 333 Fuquan Road
North IBP
Changning District, Shanghai
200335 China
Phone +86 21 22181111
Fax: +86 21 22182398
www.boschsecurity.com.cn

America Latina:

Robert Bosch Ltda Security Systems Division
Via Anhanguera, Km 98
CEP 13065-900
Campinas, Sao Paulo, Brazil
Phone: +55 19 2103 2860
Fax: +55 19 2103 2862
latam.boschsecurity@bosch.com
www.boschsecurity.com