


D7035 Octal Relay Modules

www.boschsecurity.com



BOSCH
Invented for life

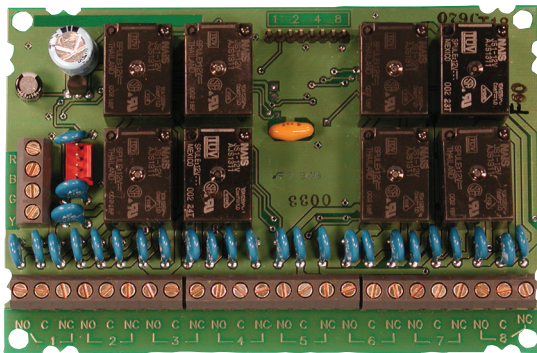

- ▶ Eight Form C programmable relay outputs
- ▶ D7035 mounts conveniently inside the FACP enclosure; no separate enclosure needed
- ▶ D7035B includes mounting skirt and enclosure for mounting outside of the FACP enclosure
- ▶ Up to two modules are supported by the FACP

The D7035 Octal Relay Modules include the D7035 and the D7035B. The modules provide eight Form C relay outputs for the D7024 Fire Alarm Control Panel (FACP), the FPD-7024 FACP, or the FPA-1000 Analog/Addressable Fire Panels. These relay outputs can connect the FACP with other systems or keypad inputs. The relays can also be used for door closure, fan control, annunciators, indicators, or other dry contact input devices. Normally-open (NO) or normally-closed (NC) contacts can indicate alarm, supervisory, or trouble conditions. The outputs on these modules are programmable. Each output operates individually from the other seven outputs on the module for complete flexibility. The outputs can also be activated by several different system events. Up to two D7035 or D7035B modules are allowed on the FACP.



Notice

The D7024 is **not** listed under UL864, 9th edition.

Certifications and approvals

Region	Certification	
USA	UL	UOJZ: Control Units, System (ANSI/UL 864) D7035 only
	FM	D7035 Family
	CSFM	see our website
	FDNY-CoA	#6101
	FDNY-CoA	#6173

Installation/configuration notes

Compatibility Information

The following products are compatible with the D7035 and D7035B Octal Relay Modules:

Category	Product ID	Product Description
Control Panels	D7024*	Addressable FACP
	D7024	Conventional FACP
	FPD-7024*	Addressable FACP
	FPD-7024	Conventional FACP
	FPA-1000	Analog Addressable Fire Panels

Modules	D132B	Smoke detector reversing relay module
	D185	Reversing polarity module
	D275	EOL power supervision module
	D7014	Zone converter module
	D7015	Class B to Class A NAC converter
	D7031	Silence reset module
	D7034	Four-point expander

* When used with a D7039 Multiplex Expansion Module, the D7024 and FPD-7024 Conventional FACP's become Addressable FACP's.

Mounting Considerations

- D7035 Module:
Mount the D7035 directly in the control panel enclosure using the provided mounting site.
- D7035B Module:
The D7035B module comes with a mounting skirt and its own red metal enclosure for mounting outside the FACP enclosure when space is limited. The module can be mounted up to 500 ft (152 m) from the control panel using 18 AWG (1.2 mm) wire.

Wiring Considerations

The FACP sends 12 VDC power and data from the Option Bus to the input terminals on the modules through four wires as a supervised Class B (Style 4) communication circuit. The wiring terminals are color-coded. The length of the wire attached to the option bus terminals must not exceed 4000 ft (1219 m).

Parts included

D7035

Quant.	Component
1	Octal relay module
1	Hardware pack
1	Literature pack

D7035B

Quant.	Component
1	D7035 Octal Relay Module
1	Mounting plate (MP-D203)
1	Red enclosure (AE203R)

Technical specifications

Environmental Considerations

Environment:	Indoor, dry
--------------	-------------

Mechanical Properties

Board Dimensions [H x W x D]:	5.0 in. x 3.3 in. x 0.8 in. (13.0 cm x 8.3 cm x 2.1 cm)
-------------------------------	--

D7035B Enclosure Dimensions [H x W x D]:	5.25 in. x 7.75 in. x 2.5 in. (13.3 cm x 19.7 cm x 6.4 cm)
--	---

Outputs

Relay Contact Rating:	5.0 A at 28.0 VDC
-----------------------	-------------------

Power Requirements (Option Bus)

Current Draw:	7 mA + 35 mA per energized relay (use 5 mA + 26 mA per energized relay for battery calculations)
---------------	---

Voltage (supply):	12.0 VDC nominal
-------------------	------------------

Ordering information

D7035 Octal Relay Module

Provide eight Form C relay outputs (w/o enclosure) for the D7024, FPD-7024, or FPA-1000 Fire Alarm Control Panels (FACP)

Order number **D7035**

D7035B Octal Relay Module with Enclosure

Provide eight Form C relay outputs (w/ enclosure) for the D7024, FPD-7024, or FPA-1000 Fire Alarm Control Panels (FACP)

Order number **D7035B**

Accessories

MP-D203 Mounting Plate Accessory

Kit consisting of a 44981B Mounting Skirt with associated plastic standoffs and mounting screws

Order number **MP-D203**

Represented by:

Americas:

Bosch Security Systems, Inc.
130 Perinton Parkway
Fairport, New York, 14450, USA
Phone: +1 800 289 0096
Fax: +1 585 223 9180
security.sales@us.bosch.com
www.boschsecurity.us

Europe, Middle East, Africa:

Bosch Security Systems B.V.
P.O. Box 80002
5617 BA Eindhoven, The Netherlands
Phone: + 31 40 2577 284
Fax: +31 40 2577 330
emea.securitysystems@bosch.com
www.boschsecurity.com

Asia-Pacific:

Robert Bosch (SEA) Pte Ltd, Security
Systems
11 Bishan Street 21
Singapore 573943
Phone: +65 6571 2808
Fax: +65 6571 2699
apr.securitysystems@bosch.com
www.boschsecurity.asia

China:

Bosch (Shanghai) Security Systems Ltd.
201 Building, No. 333 Fuquan Road
North IBP
Changning District, Shanghai
200335 China
Phone +86 21 22181111
Fax: +86 21 22182398
www.boschsecurity.com.cn

America Latina:

Robert Bosch Ltda Security Systems Division
Via Anhanguera, Km 98
CEP 13065-900
Campinas, Sao Paulo, Brazil
Phone: +55 19 2103 2860
Fax: +55 19 2103 2862
latam.boschsecurity@bosch.com
www.boschsecurity.com